VTH 12 U



APPLICATION

Extrusion profiles, plastic strips, soft woods, hard woods and all kinds of timber waste that occur in typical carpenter's workshops and joineries. Especially for long pieces of materials.




VTH 12 U


Example

VTH 45/12/2 U

Front view

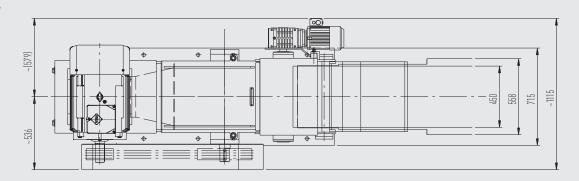

Side view

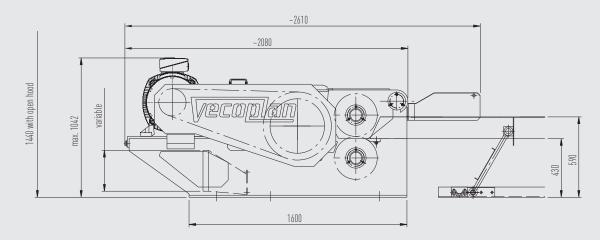

| DETAILS | | VTH 45/12/2 | VTH 65/12/2 | VTH 85/12/2 |
|----------------------|---------|-------------|-------------|-------------|
| Infeed opening | mm | 450 x 120 | 650 x 120 | 850 x 120 |
| Infeed rollers | qty | 2 | 2 | 2 |
| Rotor diameter | mm | 400 | 400 | 400 |
| Number of tools | qty | 24 | 34 | 44 |
| Rotor speed | rpm | 500 | 500 | 500 |
| Required motor power | kW | 30 - 37 | 30 - 45 | 45 - 75 |
| Max. capacity | stere/h | 4 * | 6 * | 7 * |
| Weight approx. | kgs | 1900 | 2250 | 2600 |

Subject to technical changes without notice / Dated 09/2010 Version only available with cutting crown rotor.

* Depending on input material and screen perforation