

APPLICATION

For re-shredding waste products previously processed in the timber industry, such as log end pieces, demolition waste, etc. The wood chips produced are used as fuel in heating installations in order to generate process heat.




HR 35


Example

HR 75/35





Plan view

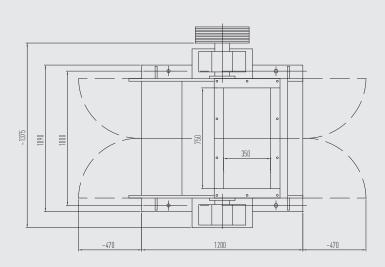

DETAILS HR 75/35 750 x 350 Infeed opening mm Rotor diameter mm 700 2 - 4 Number of chipping knives qty Rotor speed 650 - 820 rpm 5 - 30 * Chipping length mm Required motor power kW 55 - 110 35 * Max. capacity stere/h Weight approx. 4350 kgs

Subject to technical changes without notice / Dated: 01/2010 Also available as SR and RHR versions.

* Depending on input material and screen perforation