





APPLICATION

Our chain belt conveyor (type KGF) is designed to receive or feed medium to heavy-weight bulk materials or piece goods, primarily in the paper and recycling industry. A range of models are available and it can be used with a gradient of up to 35 degrees. In addition, a version with several bends is available. Extremely stable: steel carriers are bolted to the rubber belt, while bush conveyor chains provide the necessary traction.

Side view

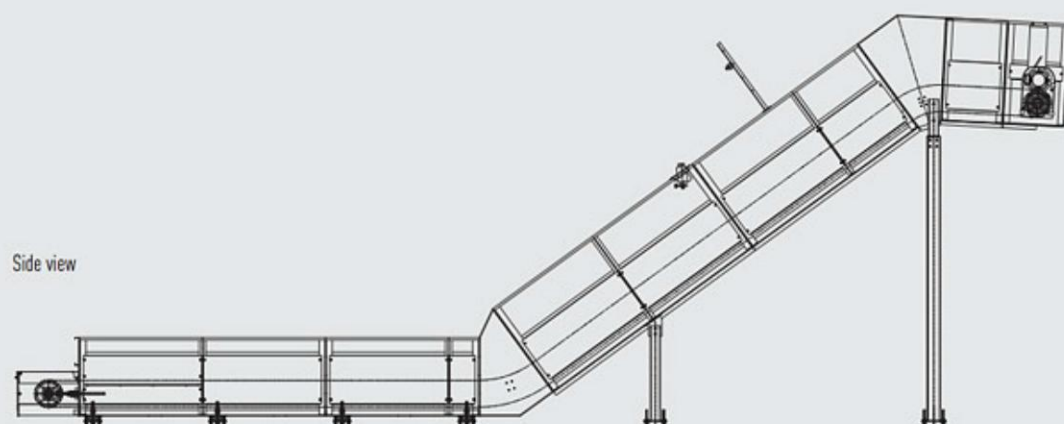

Front view



DETAILS

		KGF 800	KGF 1000	KGF 1200	KGF 1400	KGF 1600	KGF 1800	KGF 2000
Belt width	mm	800	1000	1200	1400	1600	1800	2000
Width of trough top A	mm	950	1150	1350	1550	1750	1950	2150
Width of trough top B	mm	650	850	1050	1250	1450	1650	1850
Conveying capacity approx.	m ³ /h *	180	225	265	310	350	395	435

Subject to technical changes without notice / Detailed dimension drawings and load data available on request / Dated: 04/2012

* depends on material, conveying speed and fill height